


MINIFLEX3-BF

0.3mm Pitch

Horizontal Type
Rear Drive Locking Type

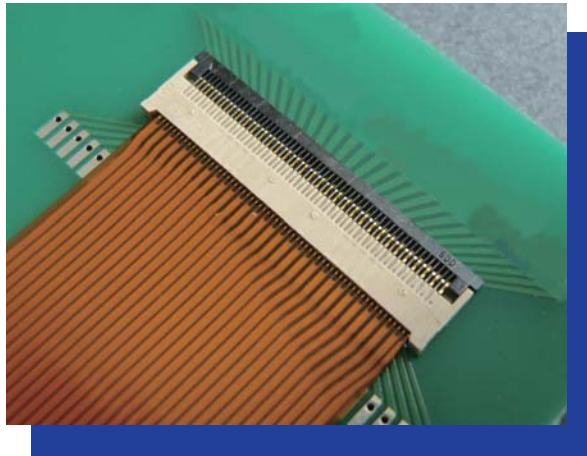

- Profile Height : 0.9mm
- Reduced actuator loading force by Sequential lock
- Strong FPC retention with “Rear Drive” Lock
- Easy FPC connecting operation with open position of actuators on shipping
- Available for either top or bottom FPC conductor

【Number of Position】

60p

【Applicable Thickness of FPC】

FPC Thickness	0.2 ±0.03mm
---------------	-------------


【Ordering Code】

20417- 060 E - 01
①



①	Packaging	E	Emboss Tape
---	-----------	---	-------------

【Material / Finish】


Parts	Material	Plating / Color
HOUSING	LCP UL94V-0	NATURAL
ACTUATOR	LCP UL94V-0	BLACK
CONTACT A	COPPER ALLOY	Au
CONTACT B	COPPER ALLOY	Au (with Ni stripe)

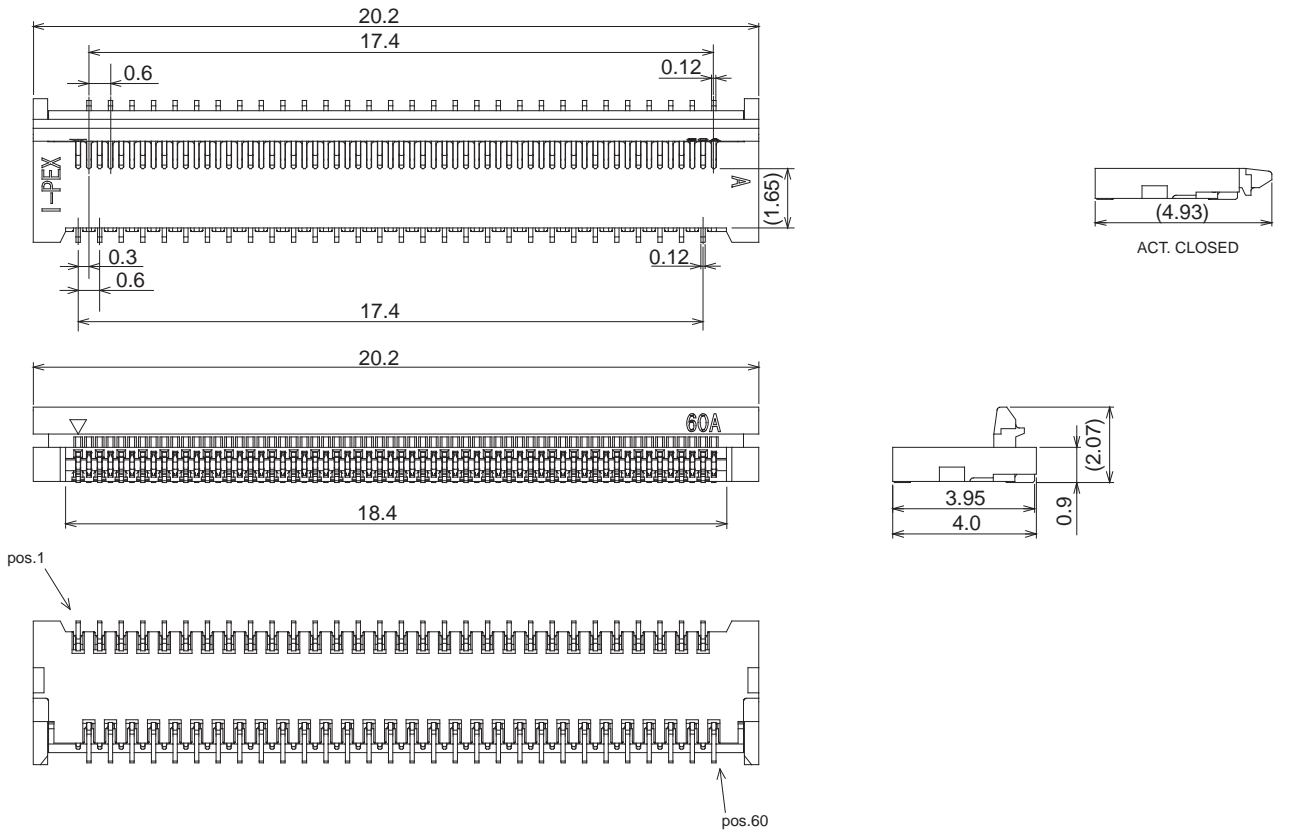

RECOMMENDED PATTERN LAYOUT

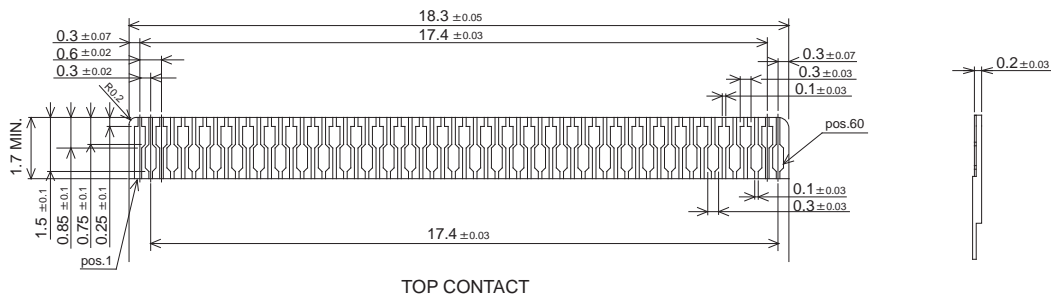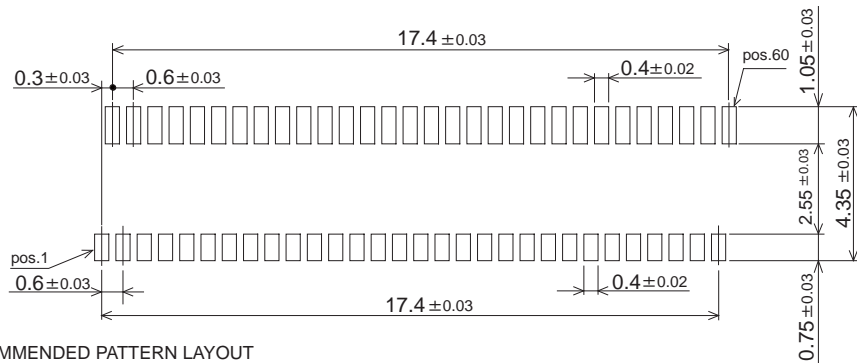

TOP CONTACT

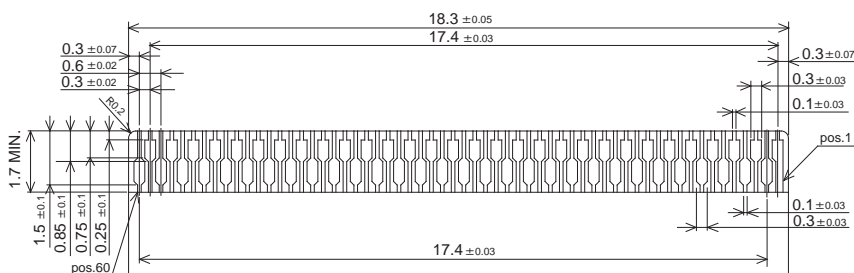

BOTTOM CONTACT

RECOMMENDED FPC PATTERN