

MINIFLEX5-BF

0.5mm Pitch

Horizontal Type
Rear Drive Locking Type



- Profile Height : 1.0mm
- Higher reliability structure and compact size
- Strong FPC retention with “Rear Drive” Lock.
- Available for either top or bottom FPC conductor
- Applicable for 0.3mm FPC thickness.
Smooth operation for FPC insertion.

【Number of Positions】

4p, 6p, 8p, 10p, 12p, 14p, 16p
18p, 20p, 22p, 24p, 26p, 28p

【Applicable Thickness of FPC】

FPC Thickness	0.3 ±0.05mm
---------------	-------------







【Ordering Code】

20397- 0 ** E - **02**
① ②

①	POS.	04: 4pos 06: 6pos 08: 8pos 10: 10pos 12: 12pos 14: 14pos 16: 16pos 18: 18pos 20: 20pos 22: 22pos 24: 24pos 26: 26pos 28: 28pos	
②	Packaging	E	Emboss Tape


【Material / Finish】

Parts	Material	Plating / Color
HOUSING	LCP UL94V-0	NATURAL
ACTUATOR	PPS UL94V-0	BLACK
CONTACT	COPPER ALLOY	Au
HOLD DOWN	COPPER ALLOY	Su

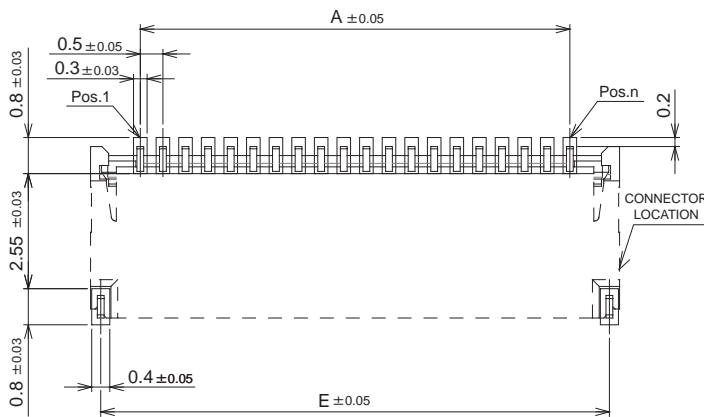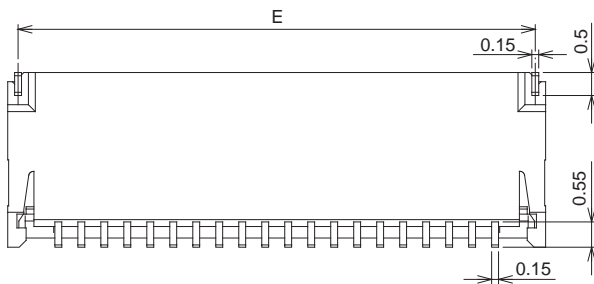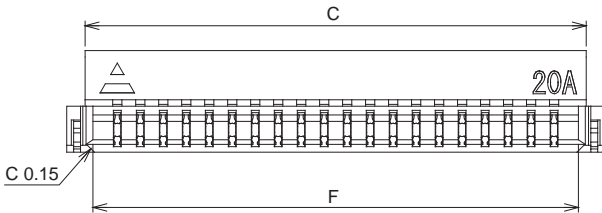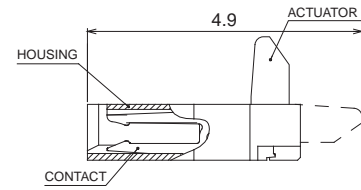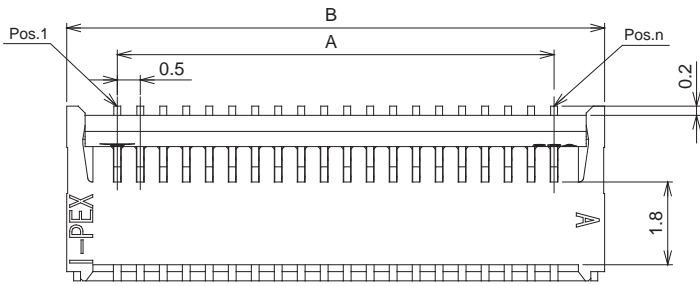

POS.	A	B	C	D	E	F
4p	1.5	3.7	2.9	2.5	3.25	2.56
6p	2.5	4.7	3.9	3.5	4.25	3.56
8p	3.5	5.7	4.9	4.5	5.25	4.56
10p	4.5	6.7	5.9	5.5	6.25	5.56
12p	5.5	7.7	6.9	6.5	7.25	6.56
14p	6.5	8.7	7.9	7.5	8.25	7.56
16p	7.5	9.7	8.9	8.5	9.25	8.56
18p	8.5	10.7	9.9	9.5	10.25	9.56
20p	9.5	11.7	10.9	10.5	11.25	10.56
22p	10.5	12.7	11.9	11.5	12.25	11.56
24p	11.5	13.7	12.9	12.5	13.25	12.56
26p	12.5	14.7	13.9	13.5	14.25	13.56
28p	13.5	15.7	14.9	14.5	15.25	14.56

RECOMMENDED PATTERN LAYOUT

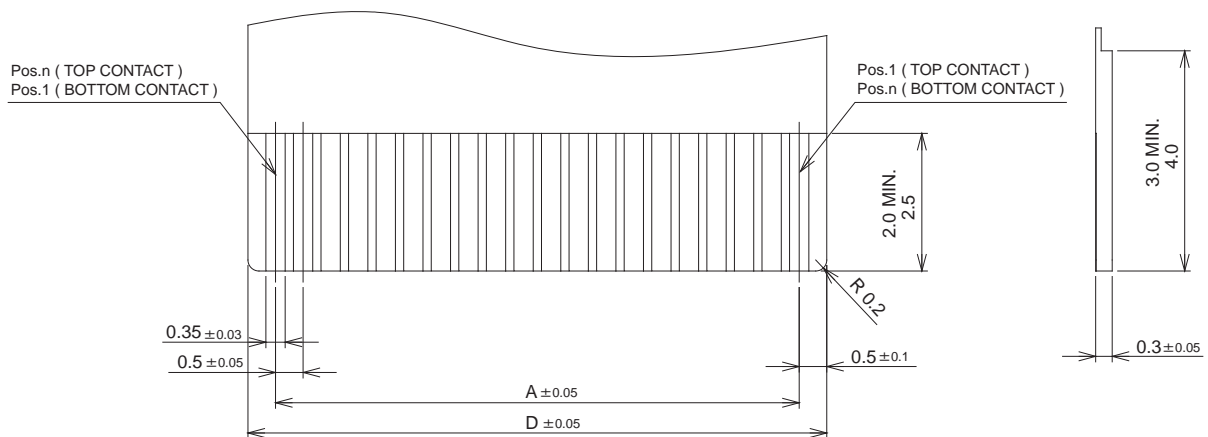

RECOMMENDED FPC PATTERN