

# MINIFLEX5-BFN

**0.5mm Pitch** Horizontal Type  
Rear Drive Locking Type  
Narrow Type



- Profile Height : 1.0mm
- Depth : 3.5mm (with actuator closed) Narrow Type  
The base projected area is reduced 29% (compared with MINIFLEX5-BF)
- Higher reliability structure
- The unique Cam structure prevents the actuator from coming off
- Available for either top or bottom FPC conductor
- Applicable for 0.3mm FPC thickness. Smooth operation for FPC insertion.

**【Number of Positions】**

4p, 10p, 12p, 16p, 22p, 30p

**【Applicable Thickness of FPC】**

<b>FPC Thickness</b>	0.3 ±0.05mm
----------------------	-------------


**【Ordering Code】**

**20488- 0 \*\* E - 01**  
                   ① ②

①	POS.	<b>04:</b> 4pos <b>10:</b> 10pos <b>12:</b> 12pos <b>16:</b> 16pos <b>22:</b> 22pos <b>30:</b> 30pos	
②	Packaging	E	Emboss Tape

**【Material / Finish】**

Parts	Material	Plating / Color
HOUSING	LCP UL94V-0	NATURAL
ACTUATOR	PPS UL94V-0	BLACK
CONTACT	COPPER ALLOY	Au
HOLD DOWN	COPPER ALLOY	Su

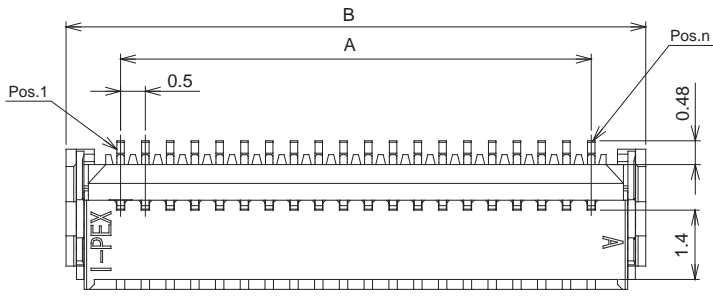

POS.	A	B	C	D	E	F
4p	1.5	3.7	2.8	2.5	3.15	2.56
10p	4.5	6.7	5.8	5.5	6.15	5.56
12p	5.5	7.7	6.8	6.5	7.15	6.56
16p	7.5	9.7	8.8	8.5	9.15	8.56
22p	10.5	12.7	11.8	11.5	12.15	11.56
30p	14.5	16.7	15.8	15.5	16.15	15.56

