


MINIFLEX5-BFS

0.5mm Pitch

Horizontal Type
Rear Drive Locking Type

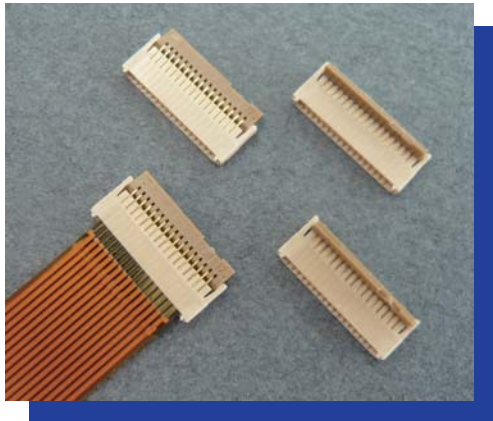

- Profile Height : 1.0mm
- Higher reliability structure and compact size
- Strong FPC retention with "Rear Drive" Lock.
- Available for either top or bottom FPC conductor

【Number of Positions】

4p, 6p, 8p, 10p, 12p,
14p, 19p, 20p

【Applicable Thickness of FPC】

FPC Thickness	0.2 ±0.03mm
---------------	-------------







【Ordering Code】

20398- 0 ** E - 02
 ① ②

①	POS.	04: 4pos 06: 6pos 08: 8pos 10: 10pos 12: 12pos 14: 14pos 19: 19pos 20: 20pos	
②	Packaging	E	Emboss Tape


【Material / Finish】

Parts	Material	Plating / Color
HOUSING	LCP UL94V-0	NATURAL
ACTUATOR	PPS UL94V-0	BEIGE
CONTACT	COPPER ALLOY	Au
HOLD DOWN	COPPER ALLOY	Su

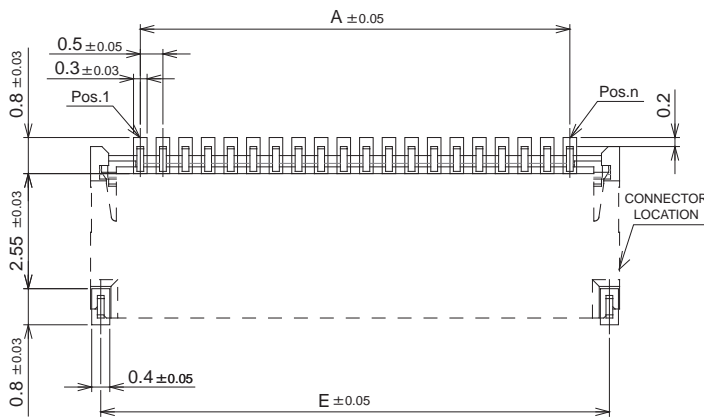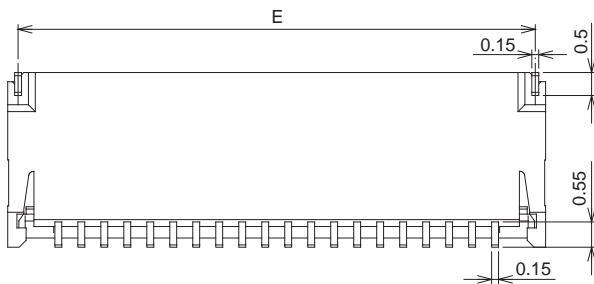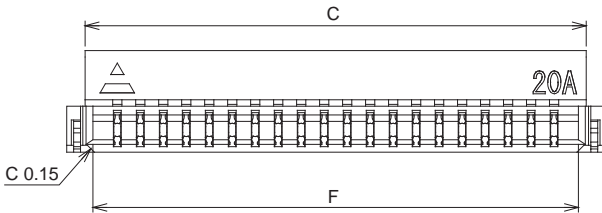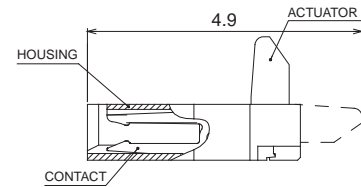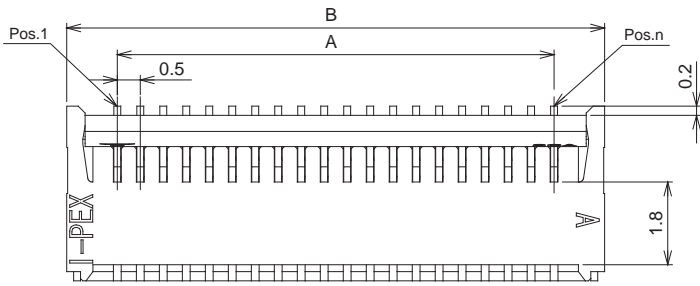

POS.	A	B	C	D	E	F
4p	1.5	3.7	2.9	2.5	3.25	2.56
6p	2.5	4.7	3.9	3.5	4.25	3.56
8p	3.5	5.7	4.9	4.5	5.25	4.56
10p	4.5	6.7	5.9	5.5	6.25	5.56
12p	5.5	7.7	6.9	6.5	7.25	6.56
14p	6.5	8.7	7.9	7.5	8.25	7.56
19p	9.0	11.2	10.4	10.0	10.75	10.06
20p	9.5	11.7	10.9	10.5	11.25	10.56

RECOMMENDED PATTERN LAYOUT

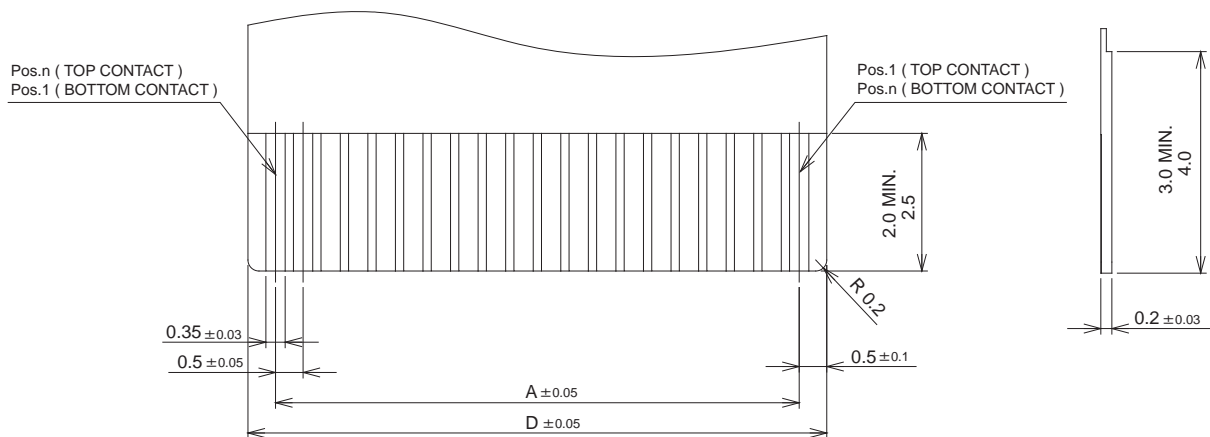

RECOMMENDED FPC PATTERN