


CABLINE[®]-UX

0.25mm Pitch Right Angle Stacking Type

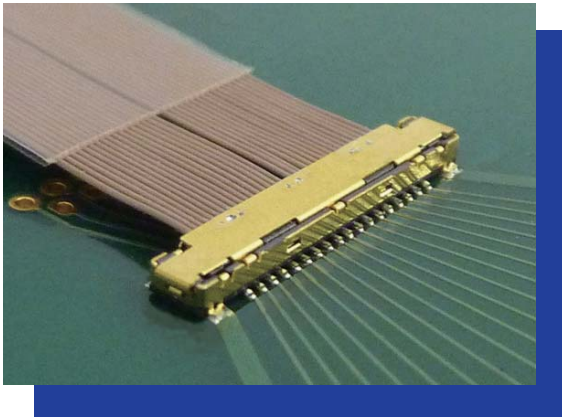

- Mating Height : MAX 1.1mm
- Depth : 2.4mm Super Small Connector
- Easy operation by appropriate click feeling and stable transmission by strong ground structure are remarkable points
- W-Point Contact with High mating reliability
- Soldering connection

【Number of Position】

34p, 40p, 50p

【Ordering Code】

PLUG Connector Set (for Cable)

Parts Ordering (HOUSING)

20510- 0 ** T - 01
 ① ②

Parts Ordering (Metal Cover)

2732- ** 1
 ①

RECEPTACLE Connector Set
 (for PC Board)

20511- 0 ** E
 ① ②

【Applicable Cable Size】

SGC	AWG #44 (Small Diameter) AWG #46
-----	-------------------------------------

①	POS.	34: 34pos 40: 40pos 50: 50pos
②	Packaging	T Tray

①	POS.	34: 34pos 40: 40pos 50: 50pos
②	Packaging	E Emboss Tape


【Material / Finish】

Product	Parts	Material	Plating / Color
PLUG	HOUSING	LCP UL94V-0	BLACK
	CONTACT	COPPER ALLOY	Au
	SHELL	COPPER ALLOY	Au
	METAL COVER	STAINLESS STEEL	Au
RECEPTACLE	HOUSING	LCP UL94V-0	BLACK
	CONTACT	COPPER ALLOY	Au
	SHELL	COPPER ALLOY	Au

PLUG


Set P/N: 20509-0**T-01

POS.	A	B	C	D	E	F
34	11.3	12.6	10.2	6.0	4.0	8.5
40	12.8	14.1	11.7	7.5	4.75	10.0
50	15.3	16.6	14.2	10.0	6.0	12.5

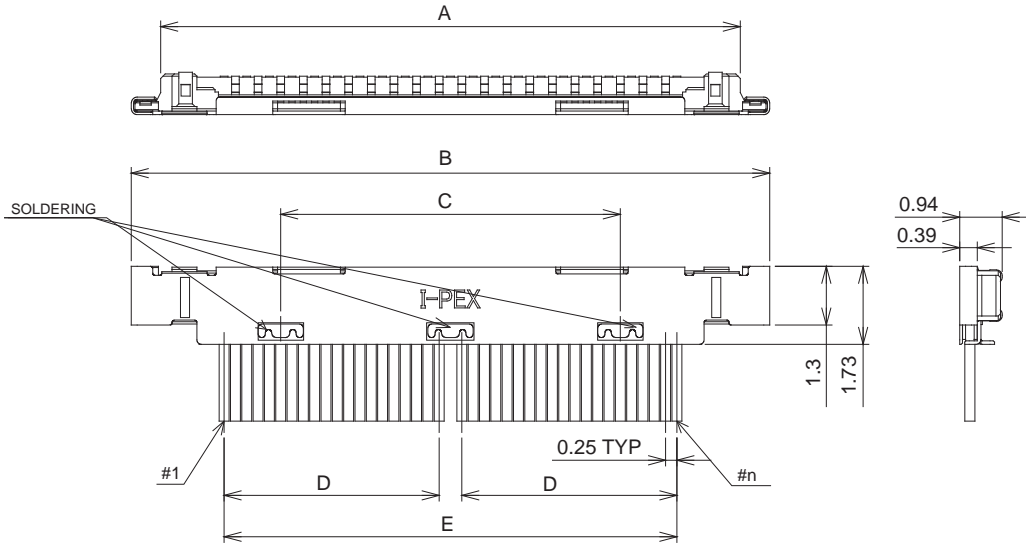

RECEPTACLE

POS.	A	B	C	D	E
34	12.20	8.50	8.50	9.30	11.11
40	13.70	10.00	10.00	10.80	12.61
50	16.20	12.50	12.50	13.30	15.11

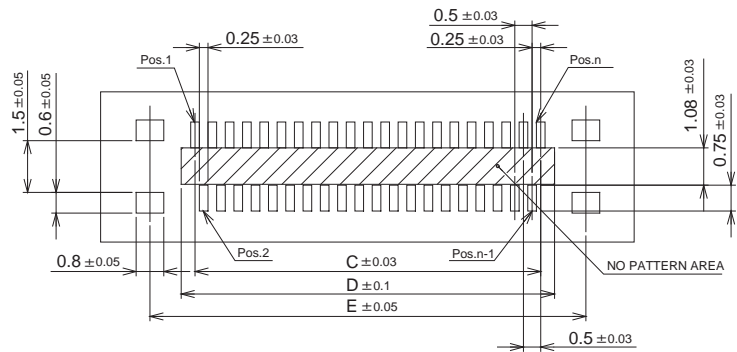

RECOMMENDED FOOTPRINT PATTERN

